


# Elevation

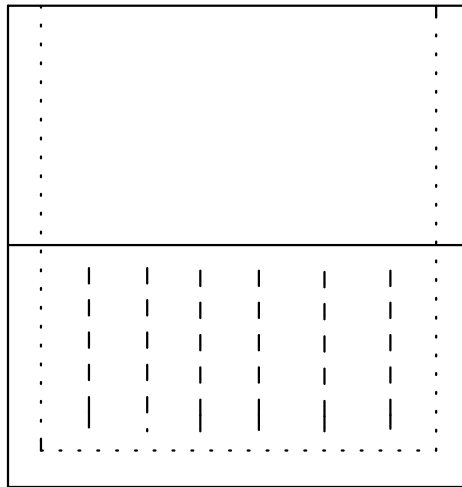

## Notes:

5,000 P.S.I. Minimum Strength Envirocore Concrete.  
 We Produce A Green And Environmentally Friendly Product.  
 Reinforce With 6 x 6 10/10 Or 6 x 6 6/6 Wire Mesh  
 1/2" & 1 1/2" Perforations

| I.D. Size | Riser Type | Standard Heights | Wall Size | Weight Per Foot | Weight With Solid Bottom | Perforations Per Foot |
|-----------|------------|------------------|-----------|-----------------|--------------------------|-----------------------|
| 30"       | Plain      | 12" Thru 24"     | 3"        | 300lbs          | 30" x 24" = 775lbs       | -                     |
| 36"       | Plain      | 12" Thru 48"     | 3"        | 385lbs          | 36" x 24" = 960lbs       | -                     |
| 36"       | Perforated | 36"              | 3"        | 355lbs          | 36" x 36" = 1320lbs      | 39                    |
| 48"       | Plain      | 12" Thru 60"     | 6"        | 900lbs          | 48" x 24" = 2500lbs      | -                     |
| 48"       | Perforated | 36"              | 4"        | 830lbs          | 48" x 36" = 3100lbs      | 45                    |
| 60"       | Plain      | 12" Thru 60"     | 6"        | 1300lbs         | 60" x 36" = 5100lbs      | -                     |

Copeland Enterprises Inc.  
 904 South Lipan  
 Denver, CO 80223

30", 36", 48", & 60" Risers

No Scale

Page 10