



Plan

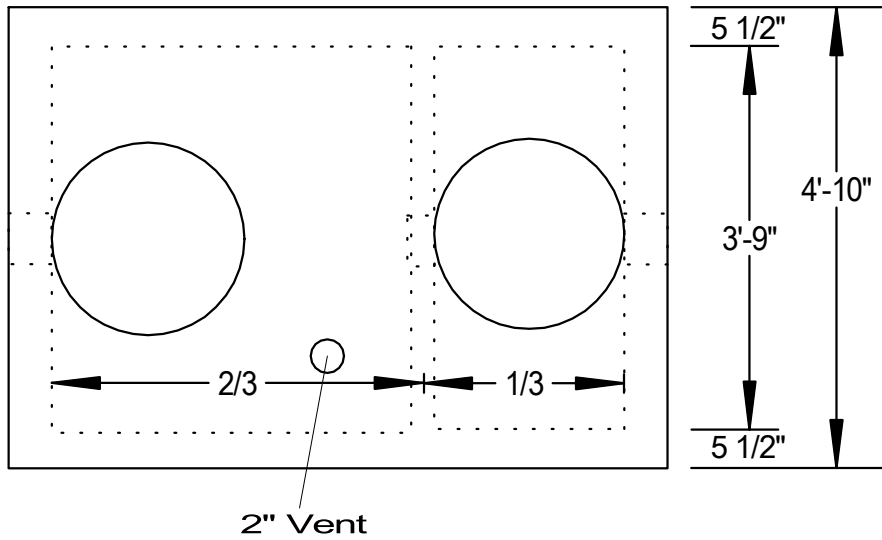

Elevation

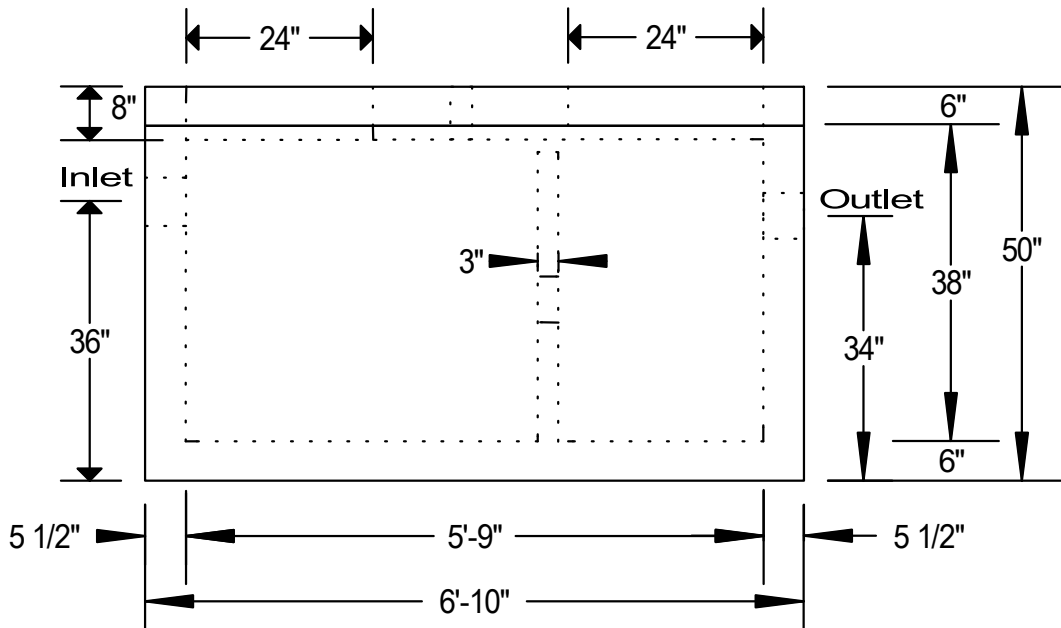

Notes:

- Reinforcing: Box 6 x 6 10/10 Wire Mesh.
- & Insert Cover- #5 @ Rebar 12" O.C.E.W. #5 Rebar Around Holes.
- Weight: Box 8,000 lbs. & Insert Cover 3,300 lbs.
- Lifting Plan: Box Use Utility Anchors (P-75).
- & Insert Cover Use 3 Lifting Plates (FL111).
- Monolithic Poured Floor. H-20 Loading.
- 2- 4¹/₃" High Pressure Boots On Standard Inlet & Outlet And 1- 2" High Pressure Boot On Standard Vent.
- Baffle Height & Location Of Holes Are Per Local Code For Each Installation.
- Installation Of Pipe Is Also According To Local Code.
- Secondary Compartment Has Volume Equal to 1/3 Of Total Capacity.
- 5,000 P.S.I. Minimum Strength Envirocore Concrete.
- We Produce A Green And Environmentally Friendly Product. Model # 11010

Copeland Enterprises Inc.
 904 South Lipan
 Denver, CO 80223

320 Gallon Grease Interceptor
 Or Sand & Oil Interceptor
 No Scale Page 85