



Plan

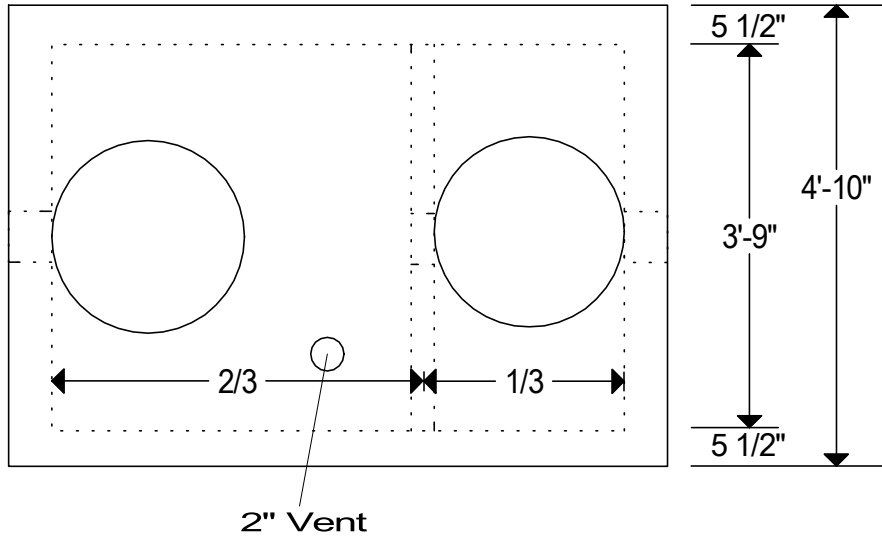

Elevation

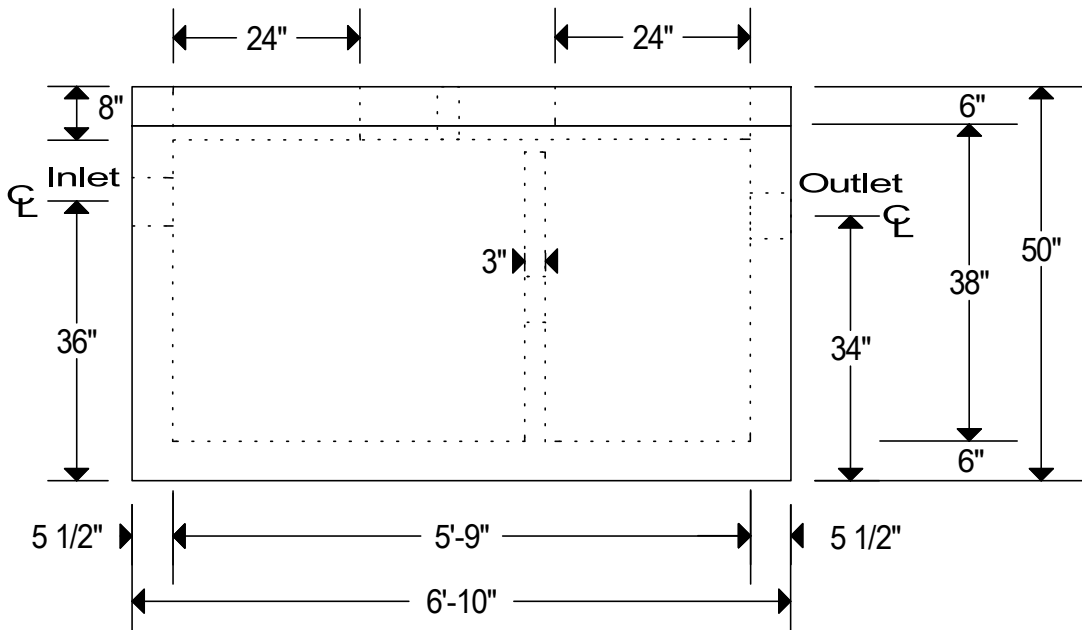

Notes:

Reinforcing: Box 6 x 6 10/10 Wire Mesh.
 & Insert Cover- #5 @ Rebar 12" O.C.E.W. #5 Rebar Around Holes.
 Weight: Box 8,000 lbs. & Insert Cover 3,300 lbs.
 Lifting Plan: Box Uses Lifting Anchors (PL54G)
 & Insert Cover Uses Wire Rope Anchors (PLLLLG)
 Monolithic Poured Floor. H-20 Loading.
 (2) - 4"/6" High Pressure Boots On Standard Inlet & Outlet
 And (1) - 2" High Pressure Boot On Standard Vent.
 Baffle Height & Location Of Holes Are Per Local Code For Each Installation.
 Installation Of Pipe Is Also According To Local Code.
 Secondary Compartment Has Volume Equal to 1/3 Of Total Capacity.
 5,000 P.S.I. Minimum Strength Concrete.
 We Produce A Green And Environmentally Friendly Product.



320 Gallon Grease Interceptor
 Or Sand & Oil Interceptor
 No Scale Page 59