

Flared End Reinforced Concrete Pipe


Pipe Specifications	Joint Specifications (Rubber Gasket)
ASTM C1932	ASTM C443

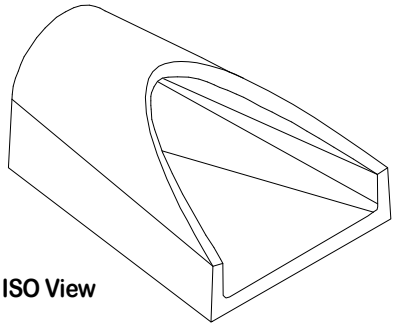


ISO View

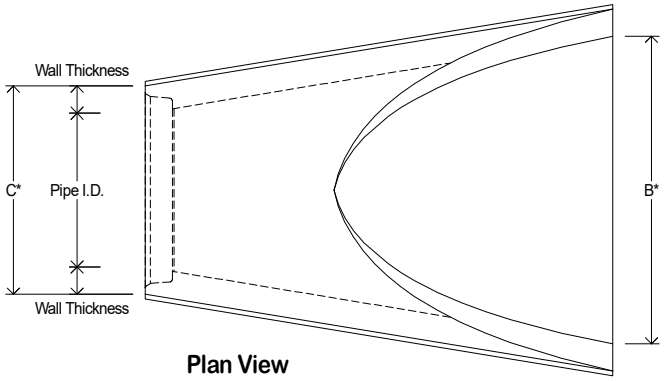

Plan View
(Bell Section)

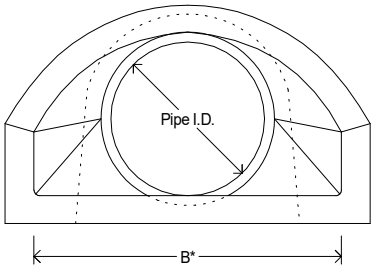

Front View

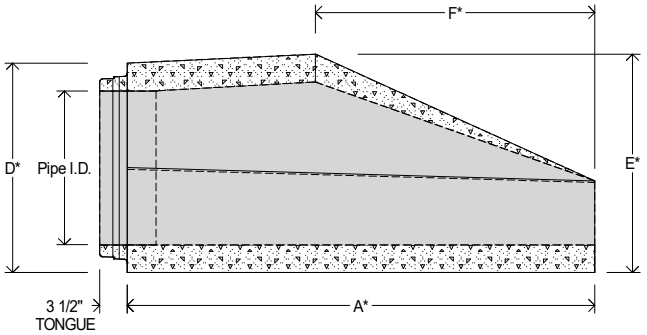

Side View
(Spigot Section)

Pipe I.D. (Inches)	A*	B*	C*	D*	E*	F*	Wall Thickness (Inches)	Section Weight (LBS.)
12"	73-1/8"	24"	19-5/8"	19-11/16"	20-5/8"	24"	3-13/16"	1,336 lbs.
15"	73-1/4"	30"	23-1/8"	23-3/16"	24-3/4"	27"	4-1/16"	1,835 lbs.
18"	73"	36"	26-5/8"	26-11/16"	28-1/32"	27"	4-9/32"	2,310 lbs.
24"	73-1/4"	48"	32-5/8"	32-11/16"	34-1/16"	43-1/2"	4-1/4"	2,826 lbs.
30"	73"	60"	39-1/2"	39-9/16"	43-9/32"	54"	4-3/4"	3,710 lbs.
36"	96-3/4"	72"	45-1/2"	45-9/16"	48-1/16"	63"	4-11/16"	6,165 lbs.
42"	97-1/2"	78"	51"	51-3/32"	54-5/16"	63"	4-1/2"	7,152 lbs.
48"	97-1/2"	84"	58"	58-1/8"	62-25/32"	72"	5"	8,665 lbs.

1) Standard RCP is specified for storm sewer applications only. For sanitary sewer applications please contact Copeland Precast, Inc.

2) RCP available as Class 3 or Class 5.

3) RCP not currently certified for use on CDOT projects. Please contact us for more information.

COPELAND PRECAST, INC. Since 1935

35582 E. 56th Ave
Bennett, CO 80137
303.936.4817
Copeland Precast.com